




HIGH PERFORMANCE VpCI PACKAGING

Eco Film™ Cryogenic, Patent Pending Extreme Low Temperature Packaging Material



Eco Film Ready for Freezer Storage

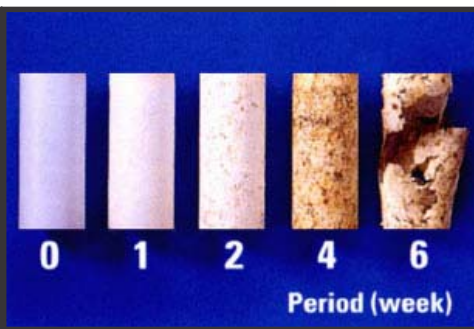

Eco Film Degrades Within Weeks



Plastic Contaminating Compost

PRODUCT DESCRIPTION

Eco Film™ Cryogenic is a DIN V 54 900 and BPS certified compostable and biodegradable packaging material specifically formulated for low temperature packaging. An ideal replacement for LDPE, HDPE and similar films, Eco Film™ Cryogenic is a unique combination of strength, versatility and resiliency. Even under the most extreme conditions, Eco Film™ Cryogenic retains its moisture resistance and strength allowing frozen food products, medical instruments and high value equipment to be securely shipped and stored.

Unlike standard polyethylene packaging materials used today, Eco Film™ Cryogenic has improved resistance to incidental exposure to liquid nitrogen, "dry ice" and similar chemicals. Once the packaging film has been used, it will biodegrade under compost conditions within weeks. The same microorganisms that break down leaves, grass clippings and other organics will ingest the Eco Film™ Cryogenic and release carbon dioxide and water. Although the amount of time needed for this process to occur varies depending on the compost conditions, under standard compost conditions Eco Film™ Cryogenic will visually change within 1-3 weeks and be entirely converted into carbon dioxide and water by the time the compost is ready for sale or use.

As most waste content studies describe, food-packaging films account for a large portion of landfill space. Additionally, plastic is the single largest contaminant in commercial compost. By switching to Eco Film™ Cryogenic this contamination is entirely eliminated.

TYPICAL PROPERTIES of blown film, 2 mils (50 microns)

Property	Test method	Unit	Value	
			Eco Film™	LDPE
Tensile strength	ISO 527	N/mm ²	32/36	26/20
Ultimate strength	ISO 527	N/mm ²	32/36	-----
Ultimate elongation	ISO 527	%	580/820	300/600
Tear propagation resistance	DIN 53363	N/mm	236/124	-----
Permeation rates: oxygen	DIN 53380	Cm ³ /m ² d·bar	1600	2900

FEATURES

- Contains NO POLYETHYLENE
- 100% biodegradable (certified under DIN V 54 900)
- Conforms to ASTM D 6400-99
- Long shelf-life and useful life
- Superior physical, mechanical strength
- Low MVTR, oxygen permeation rates



APPLICATIONS

- Food packaging
- Frozen foods, freezer bags
- Medical cryogenic packaging
- Import/export of goods while frozen
- Incidental contact of package with liquid nitrogen
- Ice cream packaging

AVAILABILITY

- Retail boxes
- Industrial rolls
- Standard and custom forms
- Laminate ready flat film
- Flat, gusset, tubing, centerfold, U-sheets, M-sheets, perfed-on-roll, drawstring

SHELF LIFE

For shipping and storage applications, *Eco Film™* Cryogenic will retain its original strength for two years or longer. *Eco Film™* Cryogenic degrades ONLY when exposed to compost conditions (microorganisms, etc), therefore under normal storage conditions *Eco Film™* Cryogenic will not biodegrade. Storage of *Eco Film™* Cryogenic while in direct contact with soil is not recommended as the film will begin to biodegrade.

FOR INDUSTRIAL USE ONLY

KEEP OUT OF REACH OF CHILDREN

KEEP CONTAINER TIGHTLY CLOSED

NOT FOR INTERNAL CONSUMPTION

CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Distributed by:

ECORR Systems
a Division of Root International, Inc.
24650 State Road 54
Lutz, FL 33559



4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
Internet <http://www.CortecVpCI.com>

printed on recycled paper 10% post consumer

Revised 4/14/03. ©Cortec Corporation 2003. All rights reserved. Supersedes: none
Cortec®, *Eco Film™*, and VpCI® are trademarks of Cortec Corporation.



Certificate No.70781

Certificate No.81867

sales@ecorrystems.com
www.ecorrystems.com

Tel: 866-830-4050
Fax: 813-264-1975