


HIGH PERFORMANCE VpCI® COATINGS



VpCI®-375

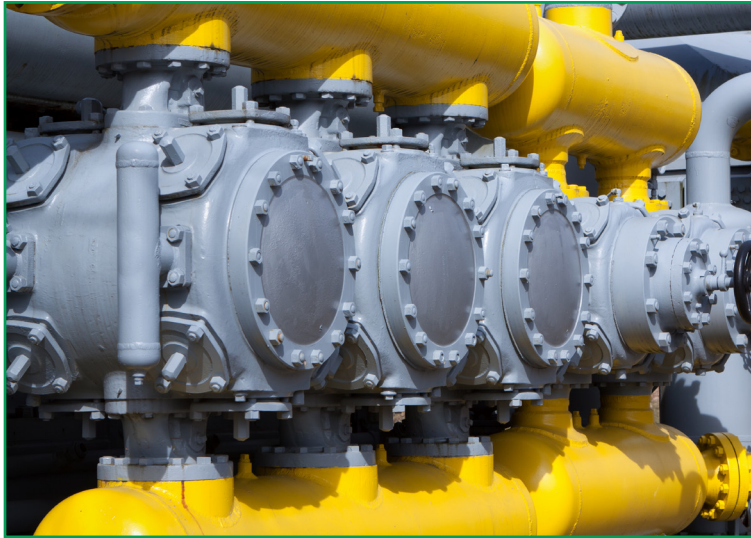

PRODUCT DESCRIPTION

VpCI®-375 is a unique, water-based acrylic one coat system (primer & topcoat) that successfully provides protection in harsh, outdoor, unsheltered applications. The complex mixture of organic inhibitors offers protection that can compete with most paints and zinc-rich primers.

VpCI®-375 provides a fast-drying thixotropic coating that is resistant to sagging or running, forming a tough protective barrier. This dry-to-touch film offers extended protection for outdoor or indoor conditions. It gives optimal outdoor performance without cracking or chipping upon prolonged exposure to sunlight.

FEATURES

- Fast-drying
- Non-flammable
- UV resistant when dried
- Optimal outdoor performance
- Can be used as one coat system (primer & topcoat)
- Provides multimetal protection

METALS PROTECTED

- Carbon steel
- Copper
- Aluminum**
- Stainless steel
- Galvanized steel**

** A wash primer such as VpCI®-373 green applied at 0.5-1.0 mils (12.5-25 microns) is recommended before applying the VpCI®-375 to these substrates.

CORROSION RESISTANCE DATA*

(on carbon steel 1010 Q-panels)

	Dry Film Thickness Mils (Microns)	Hours to Failure
ASTM B-117 (Salt-spray)	4.0-4.5 (100.0-112.5)	2500 +
ASTM D1748 (Humidity)	4.0 - 4.5 (100-112.5)	2000 +
ASTM D870 (Water Immersion Resistance)	4.0 (100)	5B Adhesion after 24 hours Recovery
		312 hours

TYPICAL PROPERTIES*

Appearance	Liquid, various colors
Density	8.5-10.2 lb/gal (1.01-1.22 kg/l)
Non-volatile Content	40-52%
Dry Film Thickness	3.0-5.0 mils (per coat) (75-125 microns)
Theoretical Spread Rate	128-214 ft ² /gal (3-5 mils) (3.2-5.3 m ² /l) (75-125 microns)
Dry to Touch Time	20 minutes @ 77°F (25°C) at 3 mils (75 microns) WFT
Fully Cured	7 days @ 77°(25°C) 55% RH
Temperature Stability	45°-90°F (7°-32°C)



CORTEC
CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

VOC (ASTM D-3960)	0.68-0.8 (81.3-96 g/l)
Viscosity	800-4000 CPS @ 77°F (25°C)***
Gloss (ASTM D532)	50 max
Pencil Hardness (ASTM D3363)	H
Adhesion (ASTM D3359)	5B
Flexibility (ASTM D522)	1/2" 180°bend
Temperature resistance (Fully Cured)	-150°F to 350°F (-78°C to 180°C)

APPLICATION

VpCI®-375 when applied in 4 mil DFT can be used as a topcoat and primer. VpCI®-375 can also be used as a topcoat with Cortec® VpCI®-374 primer. When solvent-based topcoats are applied over VpCI®-375, compatibility must be checked.

Note: Make sure dew point is more than 5°F (2°C) less than air temperature for application.

Power agitate to a uniform consistency using a "squirrel cage" type mixer, hand-held drill mixer, or other equivalent method.

VpCI®-375 can be applied by spray, roll, brush, or dip.

Conventional Spray

Manufacturer	GunModel	Tip/Aircap Combination
DeVilbiss	MBC or JGA	704E
Binks	#18 or #62	66PE

Fluid hose should be 3/8" (0.95 cm) I.D. with a maximum length of 50 feet (15.2 m). Pot should always have dual regulation and be kept at same elevation as spray gun.

Airless

Manufacturer	GunModel	Tip/Aircap Combination
Graco	205-591	Bulldog
Binks	Model 500	Mercury 5C
DeVilbiss	JGN-501	QFA-519

Hose should be 3/8" (0.95 cm) I.D. minimum, but a 1/4" (0.64 cm) I.D. whip end section may be used for ease of application. A maximum length of 100 feet (30.5 m) is suggested. Best results will be obtained using a 0.013"-0.017" (0.3-0.4 cm) tip at 1200-1700 psi (83-117 bar).

Note: Nylon or Teflon type packings are available from pump manufacturer and are highly recommended.

Note: Similar equipment may be suitable.

PACKAGING AND STORAGE

VpCI®-375 is available in 5 gallon (19 liter) pails, 55 gallon (208 liter) metal drums, liquid totes, and bulk. Keep product from freezing. Product shelf life is 1 year.

FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.
 BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Distributed by:



4119 White Bear Parkway, St. Paul, MN 55110 USA
 Phone (651) 429-1100, Fax (651) 429-1122
 Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
<http://www.cortecvci.com>

Printed on recycled paper  100% post consumer

Revised: 05/13/16. Supercedes: 08/26/13. ©Cortec Corporation 2002-2016 of Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2016, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.